
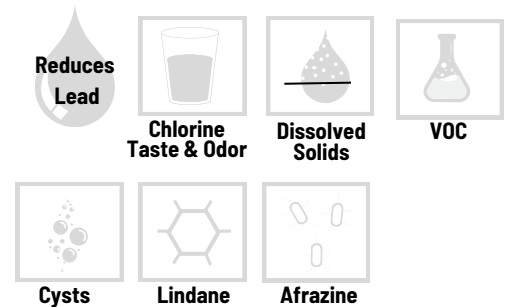
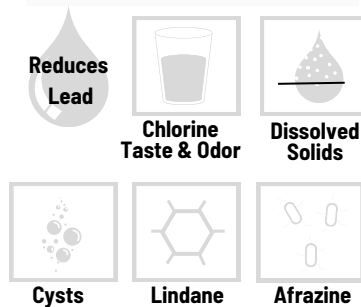


FRESHPOINT REVERSE OSMOSIS SYSTEM

McKay's
ESTD **CO.** 1927

Celebrating 97 years!



NSF/ANSI Standard 58 Certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means

Pentair FreshPoint is designed specifically for the water treatment professional to provide ease of installation and service.

Installation Tips:

- Choose a mounting location suitable to support the full weight of the system when operating.
- Install vertically with the cartridge hanging down.
- System may be installed with cartridge flush to the baseboard if desired as the mechanical assist lever pushes cartridges straight out.

Operation Tips:

- Replace pre/post filters every year and RO membrane every 12-15 months.
- Place replacement cartridges in proper sequence utilizing color-coded shapes.
- System designed with integrated check valves so cold water line does not need to be shut-off to perform cartridge change-outs.

GRO-350B System Tested and Certified by NSF International against NSF/ANSI Standard 42, 58, and CSA B483.1 for the reduction of the claims specified on the Performance Data Sheet.

GRO-475B, GRO-475M, GRO-575B & GRO-575M Systems Tested and Certified by NSF International against NSF/ANSI Standard 42, 53, 58, and CSA B483.1 for the reduction of the claims specified on the Performance Data Sheet.



3-Stage



4-Stage



5-Stage

ARSENIC	●	●	●
DISSOLVED SOLIDS	●	●	●
TASTE & ODOR	●	●	●
CHLORINE	●	●	●
LEAD	●	●	●
CYST*	●	●	●
ATRAZINE		●	●
LINDANE		●	●
VOLATILE ORGANIC CHEMICALS			●
FAUCET INCLUDED	●	●	●
CARTRIDGE TIMER & TDS MONITOR		●	●
NSF 42 & 58	●	●	●
NFS 53		●	●

*NSF/ANSI Standard 58 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means. EPA EST. NO. 082989-CHN-001